

User Instructions for Argenta hidden hinges.

Adjusting

1. Height (+/-1.5mm)




Open the screws (nr.1) using the 4mm Allen key. Place a 4mm wedge (A) under the doorblade. Tighten the screws again. If you want to achieve a different height, use a wedge of corresponding thickness (A).

2. Depth (+/- 1.5mm)

Turn the adjustment screws (nr. 2) on each hinge towards the desired direction alternating upper and lower screw. This not only adjusts the depth, but also makes sure that the doorblade is parallel to the frame. If you adjust the upper hinge towards one direction, then adjust the lower hinge in the opposite direction in order to maintain an even slot between the doorblade and frame.

3. Breadth (+/- 1,5mm)

Turn the screw (nr. 3) in the desired direction. This enables the adjustment of tightness of closing the door (pressure of sealings).

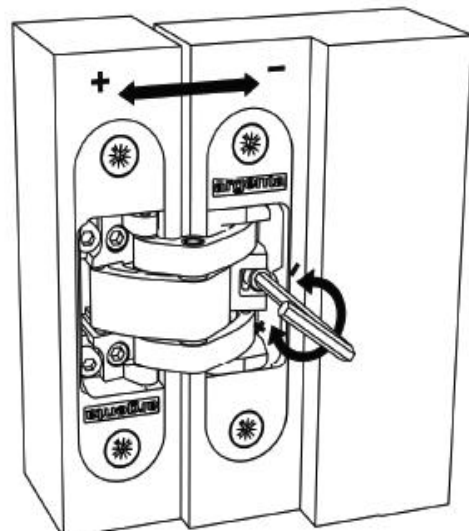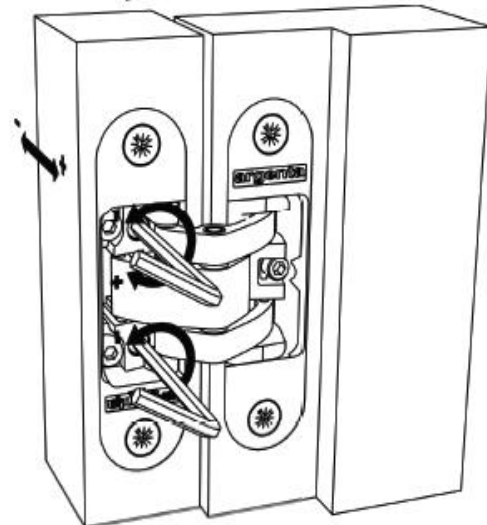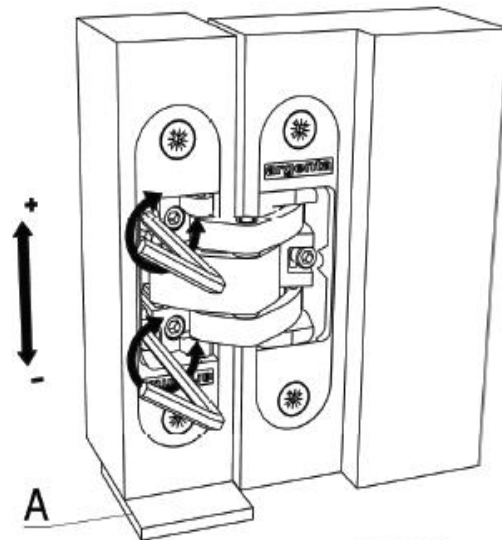

Maintenance

Argenta hidden hinge has been sufficiently oiled during production. With normal use, hinges do not need to be oiled.